

Transmittance (T) units: %

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
T	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.5	1.4	3.6	7.5	12.6	17.1	18.9	17.1	12.7	7.9	4.2	1.9	0.8
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
T	0.3	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1120	1140	1160	1180	1200				
T	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.4	0.5	0.7	1.0				

Refractive Index/Absorption coefficient/Reflection coefficient

λnm	400	500	600	700	800	900	1000
n	1.597	1.581	1.573	1.568	1.565	1.564	1.562
P	0.900	0.904	0.906	0.907	0.907	0.908	0.908

Classes of Bubbles and Inclusions

Bubble Class
3

Color Specification


	x	y	Y	λ <sub>d</sub>	P <sub>a</sub>
A	0.247	0.690	6	532	73
C	0.221	0.686	8	536	80
D65	0.216	0.693	8	535	80

Properties

Chemical		Thermal				Mechanical		Others
D <sub>w</sub>	D <sub>A</sub>	T <sub>g</sub>	T <sub>s</sub>	α -30/70	α 100/300	H <sub>K</sub>	F <sub>A</sub>	d
1	1	450	495	94	100	500	130	3.12

Tolerance of Transmittance (T)

Maximum Transmittance	Less than 1% Wavelength at Short wave Side	Less than 5% Wavelength at Long wave Side
Tmax(%)	λs1(nm)	λl5(nm)
18±3	>470	<580

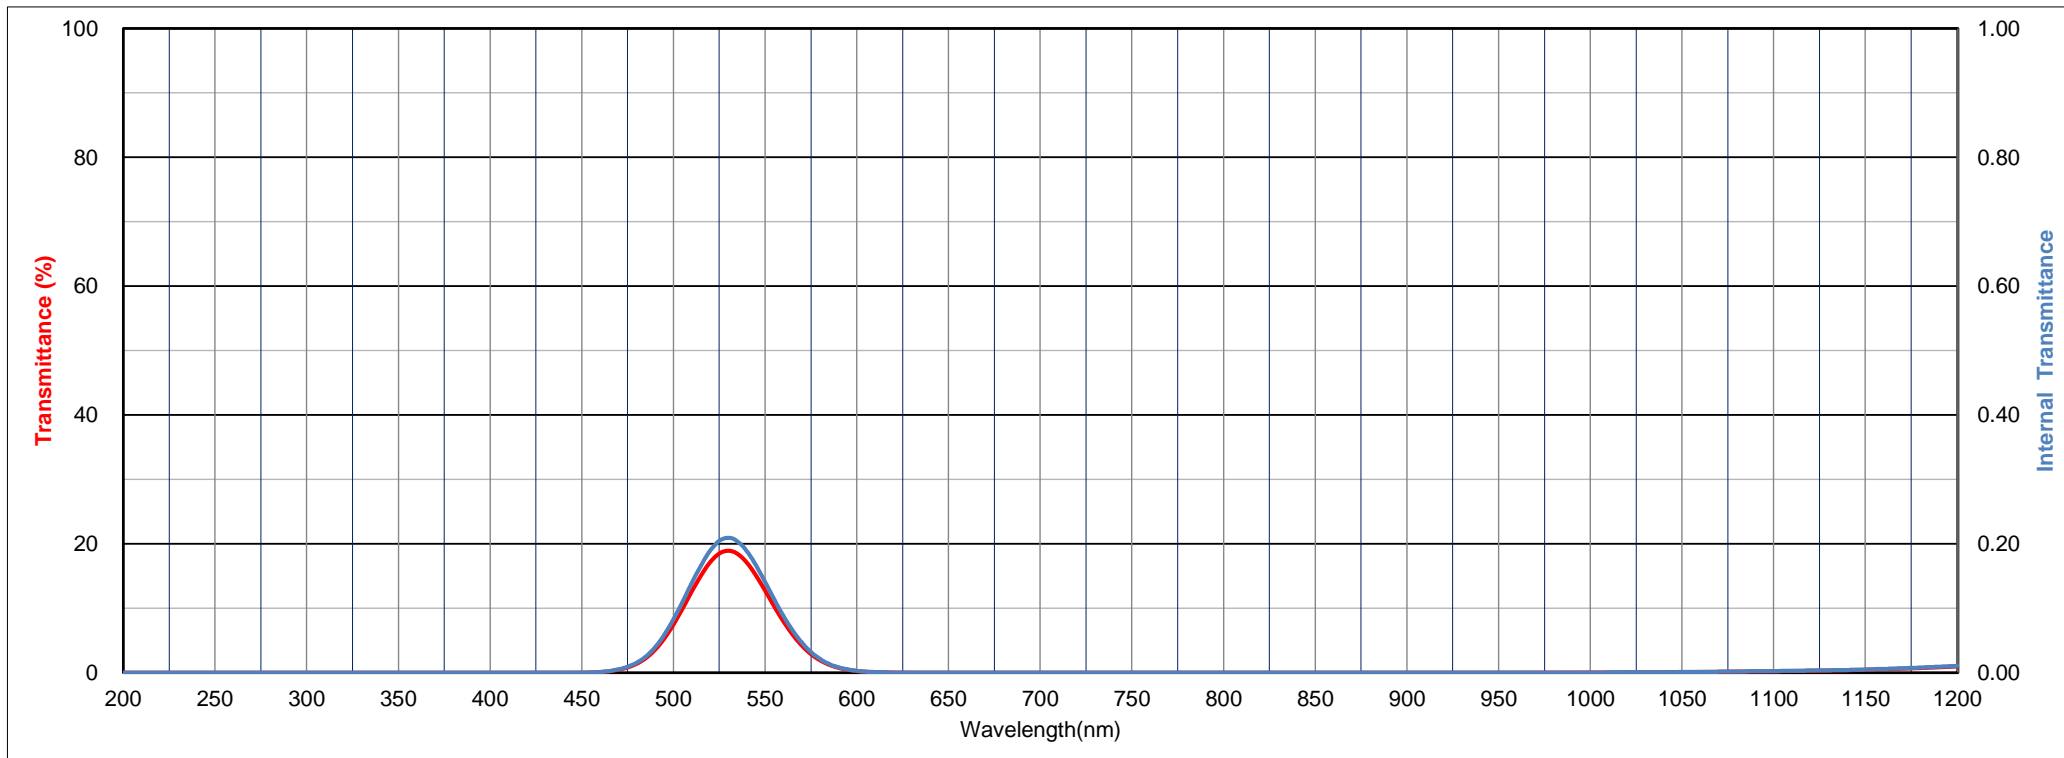

Transmittance (T) units: %

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
T	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.5	1.4	3.6	7.5	12.6	17.1	18.9	17.1	12.7	7.9	4.2	1.9	0.8
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
T	0.3	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1110	1120	1130	1140	1150	1160	1170	1180	1190
T	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.5	0.5	0.6	0.7	0.8
λnm	1200	1210	1220	1230	1240	1250	1260	1270	1280	1290	1300	1310	1320	1330	1340	1350	1360	1370	1380	1390
T	1.0	1.1	1.3	1.5	1.7	1.9	2.1	2.4	2.6	2.9	3.2	3.5	3.9	4.4	4.8	5.2	5.6	6.0	6.3	6.7
λnm	1400	1410	1420	1430	1440	1450	1460	1470	1480	1490	1500	1510	1520	1530	1540	1550	1560	1570	1580	1590
T	7.1	7.6	8.0	8.5	8.9	9.4	9.9	10.3	10.8	11.4	11.9	12.5	13.1	13.6	14.2	14.8	15.4	16.0	16.6	17.2
λnm	1600	1610	1620	1630	1640	1650	1660	1670	1680	1690	1700	1710	1720	1730	1740	1750	1760	1770	1780	1790
T	17.9	18.5	19.2	19.8	20.4	21.1	21.8	22.4	23.0	23.8	24.4	25.1	25.7	26.3	27.0	27.6	28.3	28.9	29.5	30.2
λnm	1800	1810	1820	1830	1840	1850	1860	1870	1880	1890	1900	1910	1920	1930	1940	1950	1960	1970	1980	1990
T	30.8	31.4	32.0	32.6	33.2	33.8	34.4	35.0	35.6	36.1	36.7	37.3	37.8	38.4	38.9	39.4	39.9	40.4	40.9	41.4
λnm	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950
T	41.8	44.1	46.2	48.0	49.3	50.7	52.2	53.6	54.7	55.3	56.0	56.7	57.2	57.5	56.8	42.8	28.9	26.4	26.2	26.4
λnm	3000	3050	3100	3150	3200	3250	3300	3350	3400	3450	3500	3550	3600	3650	3700	3750	3800	3850	3900	3950
T	26.3	25.5	24.1	22.3	20.4	18.7	17.2	15.9	15.0	14.4	14.2	14.4	14.8	15.3	16.0	16.8	17.6	18.6	19.4	19.9
λnm	4000	4050	4100	4150	4200	4250	4300	4350	4400	4450	4500	4550	4600	4650	4700	4750	4800	4850	4900	4950
T	20.0	19.4	18.1	16.4	14.6	12.8	11.1	9.2	7.1	5.0	3.1	1.7	0.8	0.4	0.2	0.1	0.0	0.0	0.0	0.0
λnm	5000																			
T	0.0																			

