

Transmittance (T)

units: %

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	7.4	26.6	46.9	62.3	71.8	78.0	81.3	81.8	81.2	77.1
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
T	67.4	56.5	43.5	30.1	18.9	9.3	3.1	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	5.2	25.3	51.8	71.0	81.1	85.4	87.0	87.5	87.3	87.0
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
T	86.6	86.1	85.5	84.9	84.2	83.4	82.5	81.6	80.6	79.5	78.3	77.0	75.5	73.8	71.9	69.8	67.4	64.6	61.5	58.0
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1120	1140	1160	1180	1200				
T	54.0	49.9	45.3	40.6	35.9	31.0	26.2	22.0	17.9	14.3	11.1	6.4	3.5	1.8	1.0	0.5				

Refractive Index/Absorption coefficient/Reflection coefficient

λnm	400	500	600	700	800	900	1000
n	1.541	1.533	1.528	1.526	1.524	1.522	1.521
P	0.913	0.915	0.916	0.917	0.917	0.918	0.918

Classes of Bubbles and Inclusions

Bubble Class
3

Color Specification


	x	y	Y	λ _d	P _e
A	-	-	-	-	-
C	-	-	-	-	-
D65	-	-	-	-	-

Properties

Chemical		Thermal				Mechanical		Others
D _w	D _A	T _g	T _s	α -30/70	α 100/300	H _K	F _A	d
2	1	515	565	-	102	540	110	2.62

Tolerance of Transmittance (T)

Maximum Transmittance	Less than 1% Wavelength at Short wave Side	Less than 5% Wavelength at Long wave Side
Tmax(%)	λs1(nm)	λl5(nm)
82±3	>290	<480

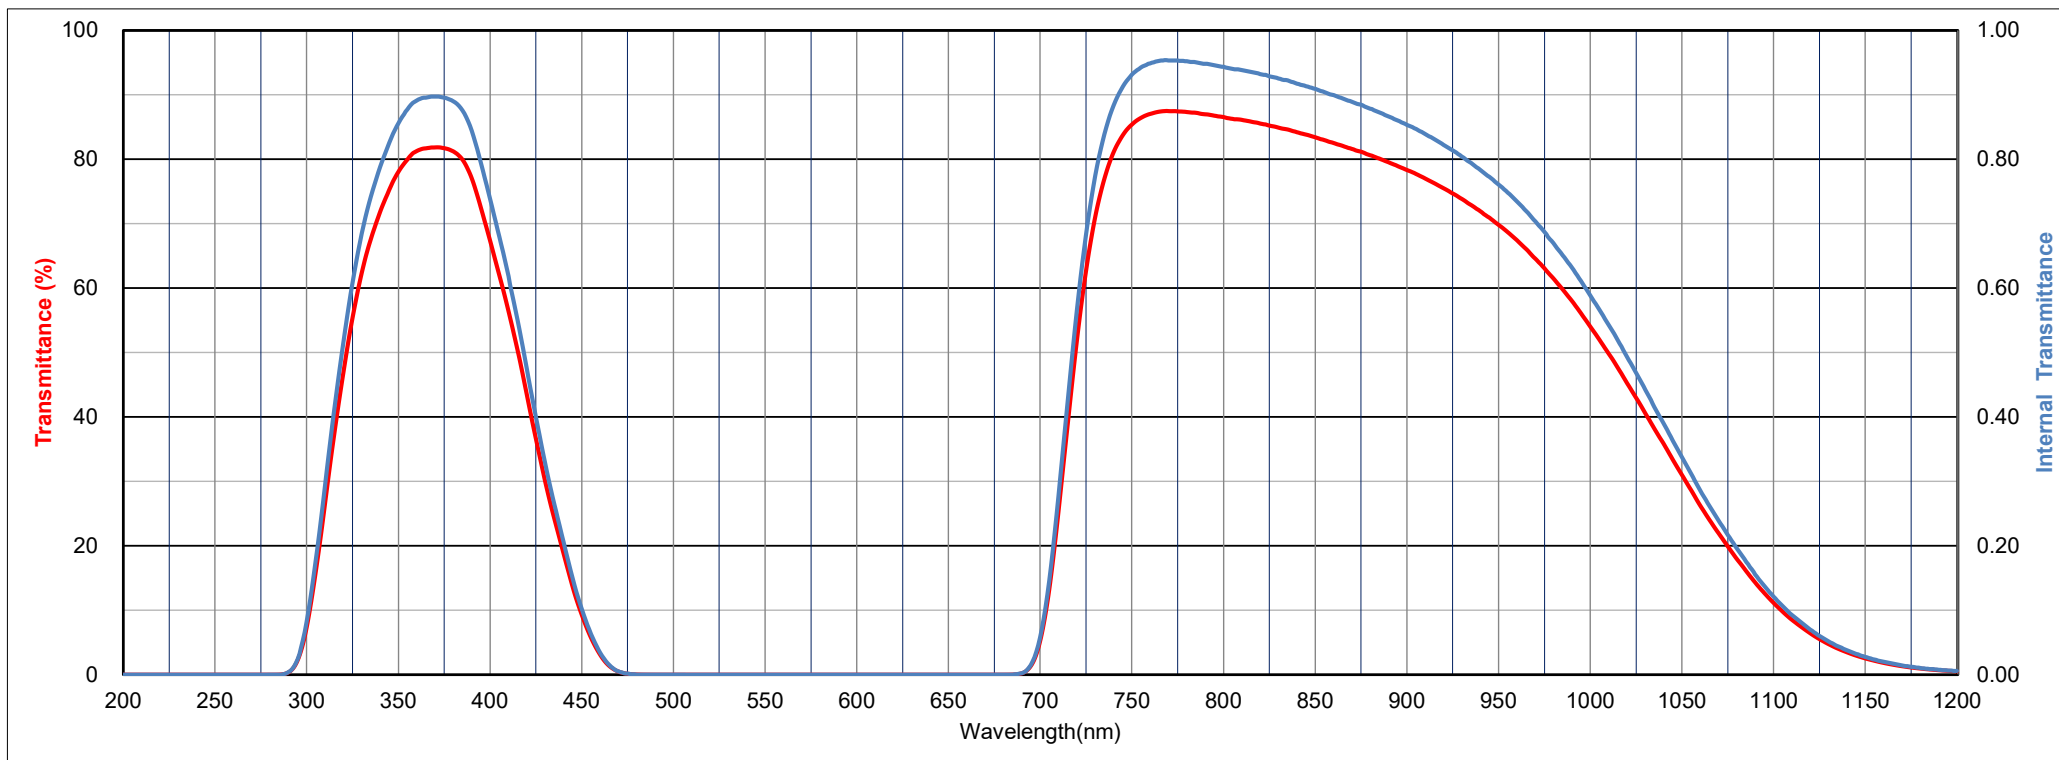

Transmittance (T)

units: %

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	7.4	26.6	46.9	62.3	71.8	78.0	81.3	81.8	81.2	77.1
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
T	67.4	56.5	43.5	30.1	18.9	9.3	3.1	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	5.2	25.3	51.8	71.0	81.1	85.4	87.0	87.5	87.3	87.0
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
T	86.6	86.1	85.5	84.9	84.2	83.4	82.5	81.6	80.6	79.5	78.3	77.0	75.5	73.8	71.9	69.8	67.4	64.6	61.5	58.0
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1110	1120	1130	1140	1150	1160	1170	1180	1190
T	54.0	49.9	45.3	40.6	35.9	31.0	26.2	22.0	17.9	14.3	11.1	8.5	6.4	4.7	3.5	2.5	1.8	1.3	1.0	0.7
λnm	1200	1210	1220	1230	1240	1250	1260	1270	1280	1290	1300	1310	1320	1330	1340	1350	1360	1370	1380	1390
T	0.5	0.4	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	0.0	0.1	0.1	0.1	0.2	0.3	0.4
λnm	1400	1410	1420	1430	1440	1450	1460	1470	1480	1490	1500	1510	1520	1530	1540	1550	1560	1570	1580	1590
T	0.4	0.5	0.5	0.6	0.7	0.8	0.9	0.9	0.9	1.0	1.0	1.1	1.1	1.1	1.2	1.2	1.1	1.1	1.0	1.0
λnm	1600	1610	1620	1630	1640	1650	1660	1670	1680	1690	1700	1710	1720	1730	1740	1750	1760	1770	1780	1790
T	0.9	0.9	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.5	0.5	0.4	0.4	0.4	0.3	0.3
λnm	1800	1810	1820	1830	1840	1850	1860	1870	1880	1890	1900	1910	1920	1930	1940	1950	1960	1970	1980	1990
T	0.2	0.1	0.0	0.0	0.1	0.2	0.3	0.4	0.5	0.7	0.9	1.1	1.3	1.5	1.8	2.0	2.4	2.7	3.0	3.3
λnm	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950
T	3.7	5.7	8.2	11.3	14.9	19.1	23.5	27.4	30.3	32.1	33.0	33.3	33.2	32.7	31.3	18.3	13.9	14.4	15.1	15.8
λnm	3000	3050	3100	3150	3200	3250	3300	3350	3400	3450	3500	3550	3600	3650	3700	3750	3800	3850	3900	3950
T	16.3	16.5	16.5	16.2	15.9	15.5	14.9	14.3	13.6	13.0	12.8	12.9	13.1	13.1	13.4	14.1	14.9	15.9	16.2	15.9
λnm	4000	4050	4100	4150	4200	4250	4300	4350	4400	4450	4500	4550	4600	4650	4700	4750	4800	4850	4900	4950
T	15.3	14.5	13.5	12.2	10.7	9.0	7.1	5.1	3.2	1.8	0.8	0.3	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	5000																			
T	0.0																			

